


SMD Power Inductor CDRH3D16



Halogen Free



Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 4.0 × 4.0 × 1.8 mm Max.
- Product weight: 80mg (Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

Environmental Data

- Operating temperature range: -40°C~+100°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+100°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging
- 7.0" diameter reel
- 1000pcs per reel


Applications

- Ideally used in Mobile phone, PDA, MP3, DSC/DVC, Portable DVD, etc as DC-DC converter inductors.

Dimension - [mm]

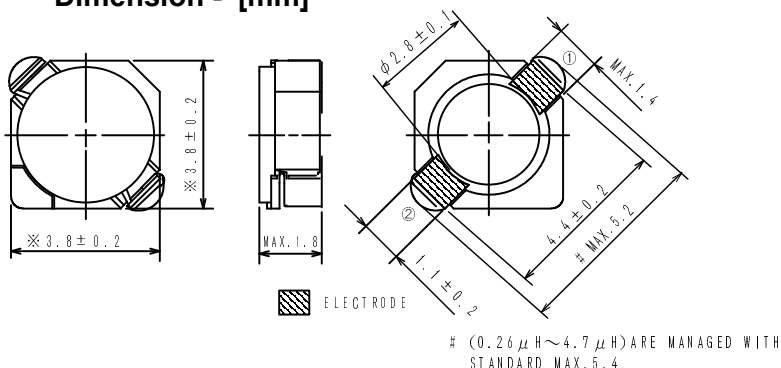


Land pattern and Schematics - [mm]

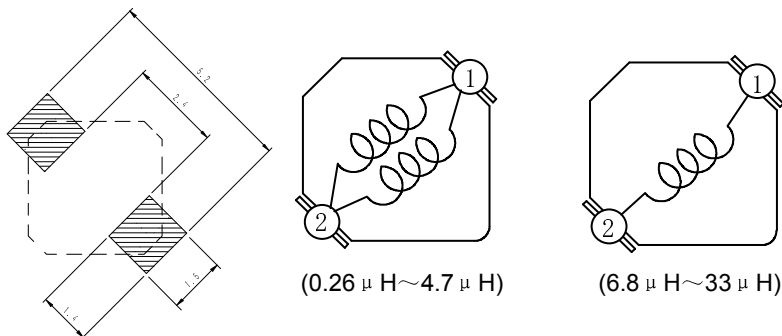

SMD Power Inductor

CDRH3D16



Electrical Characteristics

Part Name	Stamp	Inductance (μ H) [within] ※1	D.C.R. (m Ω) Max. (Typ.) (at 20°C)	Rated Current (A) ※2
CDRH3D16NP-R26NC	R	0.26 \pm 35%	27.5(21)	3.60
CDRH3D16NP-R47NC	S	0.47 \pm 35%	35(27)	2.75
CDRH3D16NP-0R7NC	T	0.7 \pm 35%	43(33)	2.25
CDRH3D16NP-1R1NC	U	1.1 \pm 35%	50(38)	1.90
CDRH3D16NP-1R5NC	A	1.5 \pm 30%	52(40)	1.55
CDRH3D16NP-2R2NC	C	2.2 \pm 30%	72(55)	1.20
CDRH3D16NP-3R3NC	E	3.3 \pm 30%	85(65)	1.10
CDRH3D16NP-4R7NC	G	4.7 \pm 30%	105(80)	0.90
CDRH3D16NP-6R8NC	I	6.8 \pm 30%	170(130)	0.73
CDRH3D16NP-100NC	K	10 \pm 30%	210(160)	0.55
CDRH3D16NP-150NC	M	15 \pm 30%	295(225)	0.45
CDRH3D16NP-220NC	O	22 \pm 30%	430(330)	0.40
CDRH3D16NP-330NC	Q	33 \pm 30%	675(520)	0.32

※1. Inductance measuring condition: at 100kHz.


※2. Rated current: The DC current at which the inductance decreases to 65% of its nominal value or when $\Delta t=30^{\circ}\text{C}$, whichever is lower ($T_a=20^{\circ}\text{C}$).

SMD Power Inductor CDRH3D16



Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

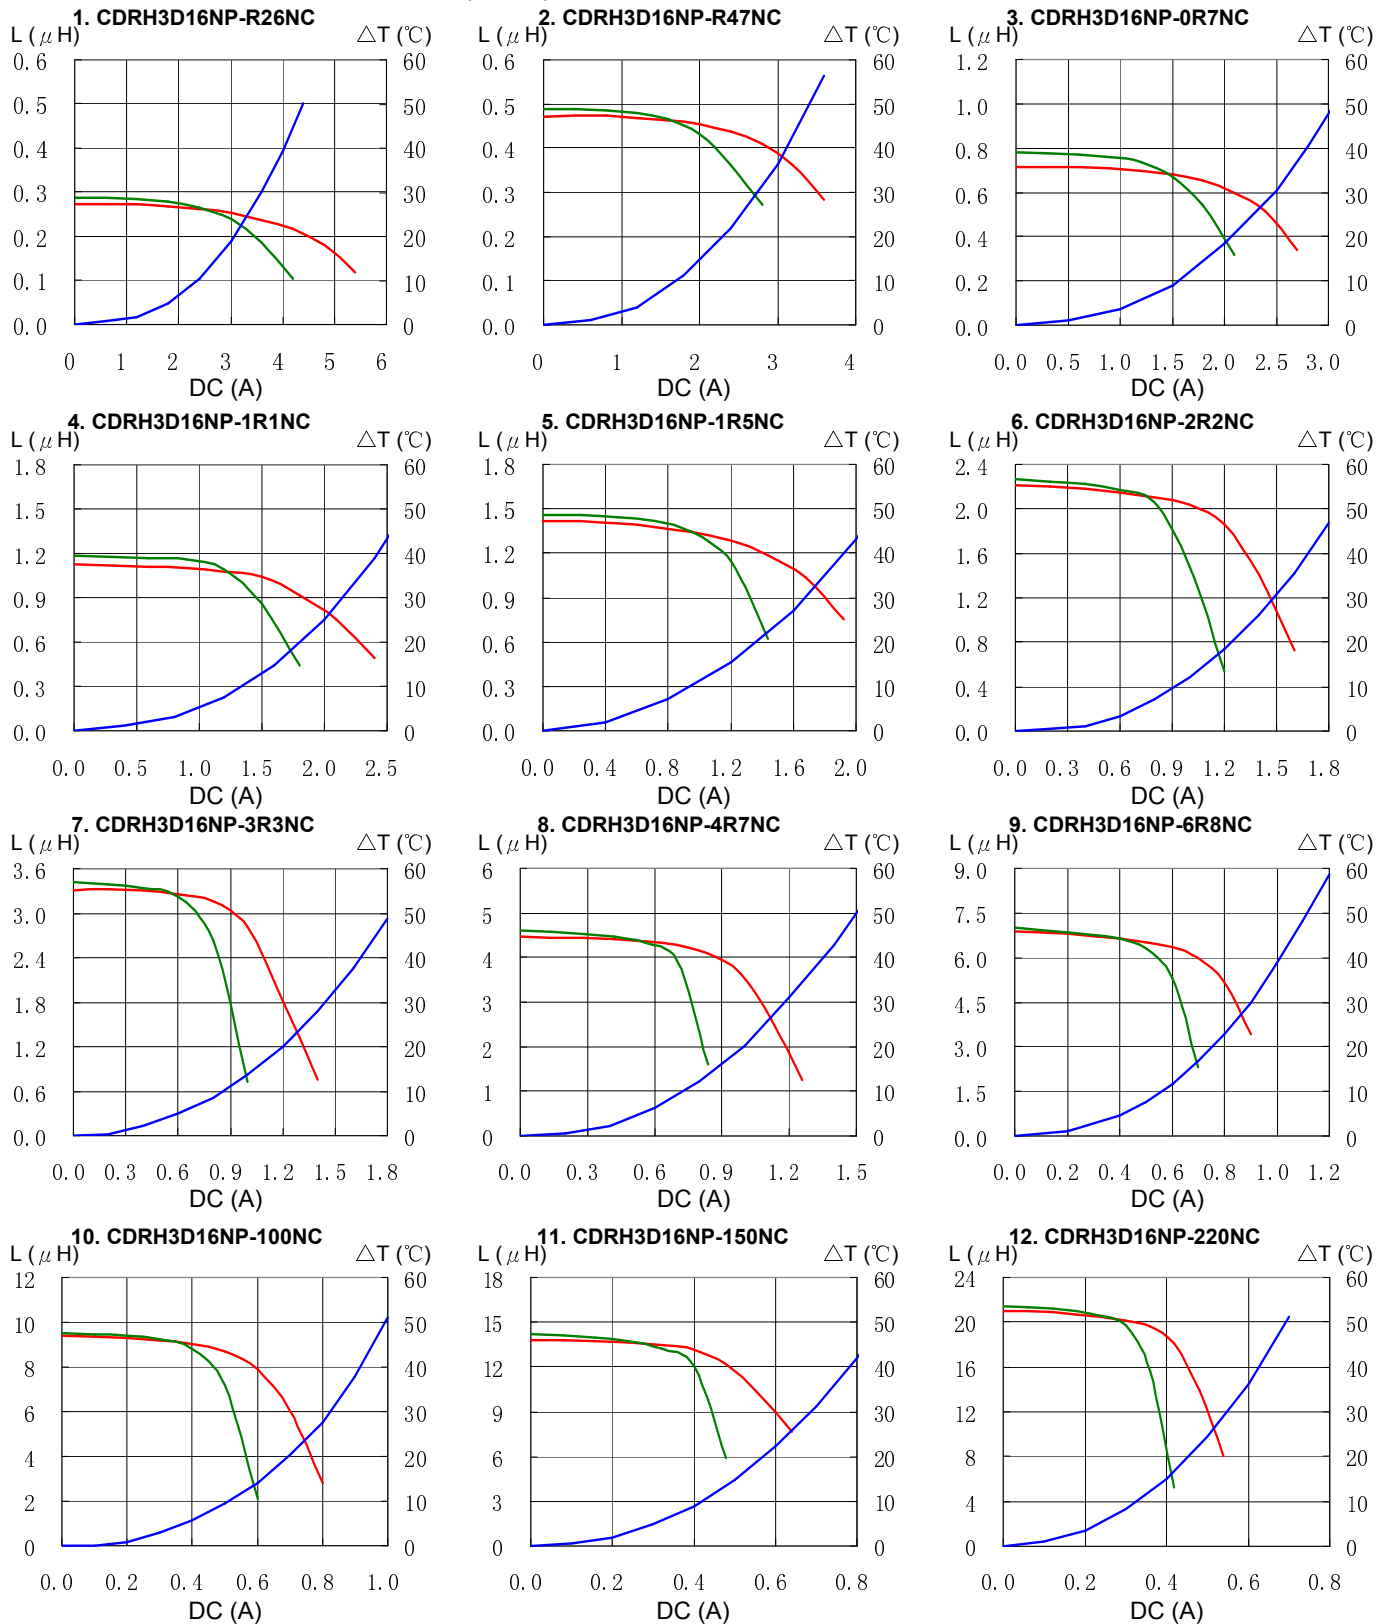


SMD Power Inductor CDRH3D16



Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

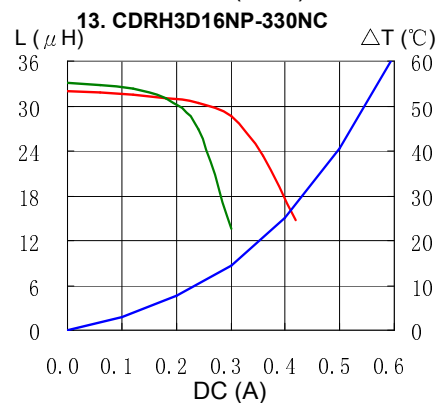

Solder Reflow Condition

